


Tank Treads Installation Guide


Parts Needed: Tank Tread Kit

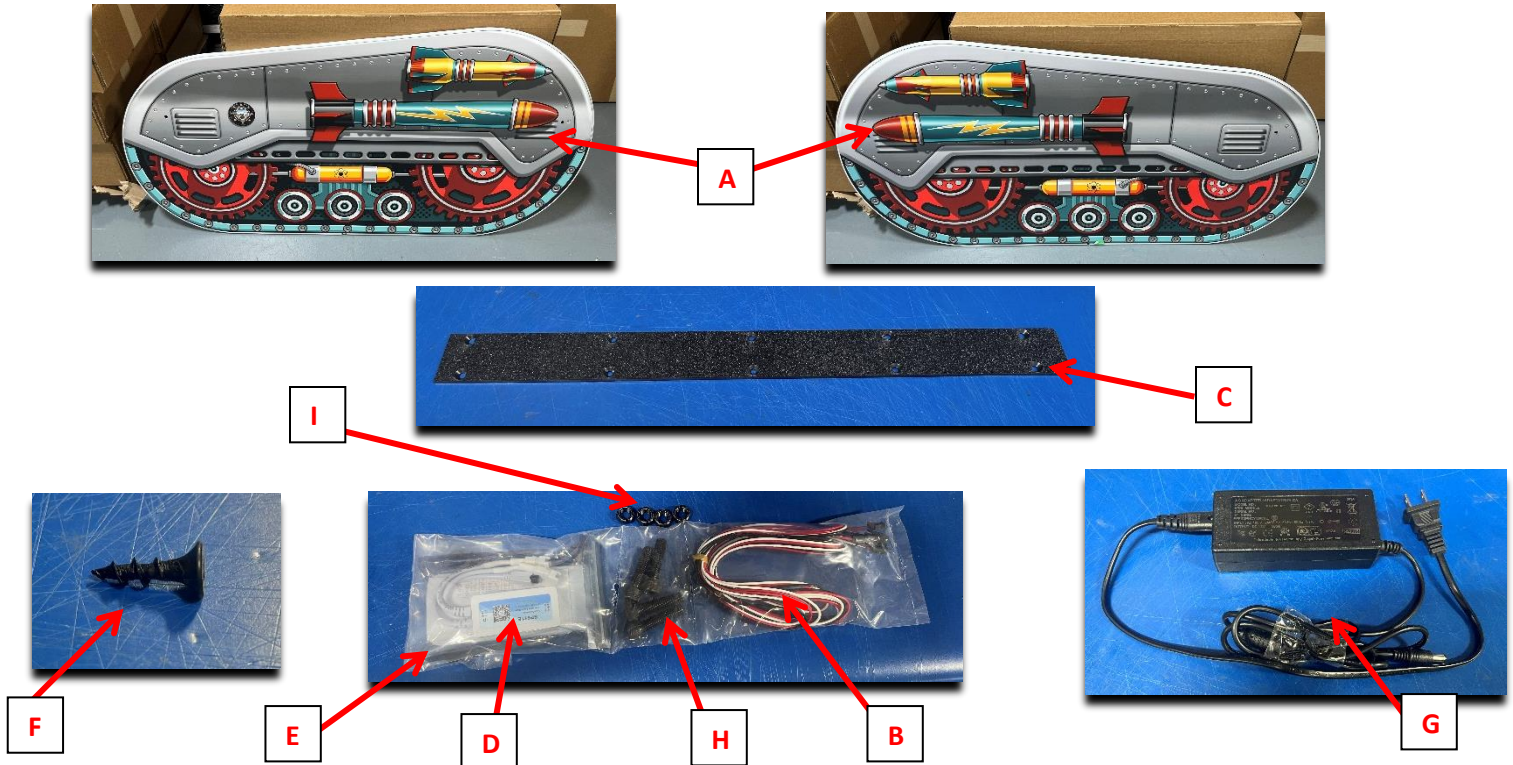


Tank Treads Parts List				
Letter	Part Number	Part	Quantity	Tools Needed
A	BASM0126-00	Tank Treads (Left + Right)	2	Phillips Head Screwdriver
B		LED Connector Cables	2	
C		Plastic Cable Cover	2	
D		Controller	1	
E		Remote	1	
F		Wood Screws – Black	20	
G	ELE0044-00	Adapter	1	5/16" Hex Wrench
H	BLT5038-24	3/8-16 x 1-1/2" Carriage Bolt	4	
I	Nut2138-00	3/8-16" Hex Nut – Black	4	

INSTRUCTIONS:

Assemble one side of the tank at a time. Start by removing the tape covering the LED cable. Plug the male end of an LED connector cable [B] into the LED connector on the tank treads.



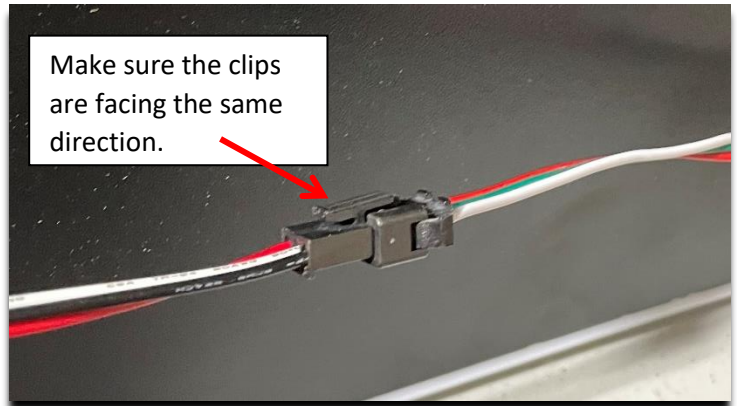


Pull the wires up the channel, cover with the plastic cable cover [C], and line it up with the predrilled holes in the tank. Screw in the cover with woodscrews [F] and a phillips head screwdriver.

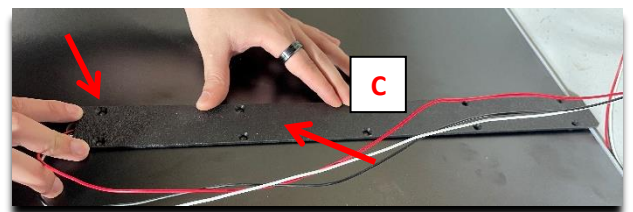


Lean the tank treads against the machine so that the rockets point toward the front of the machine.





Put one of the carriage bolts [H] through the hole in the tank and the front leg slot. Thread a hex nut [I] on the bolt, leaving slightly loose. Repeat this for the rear leg and tighten both bolts with a 5/16" hex wrench.

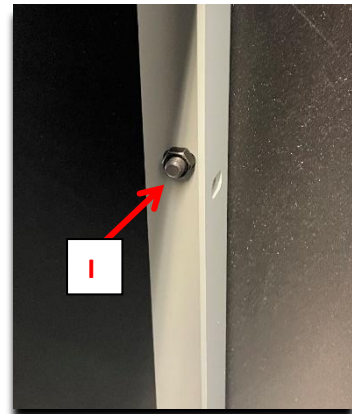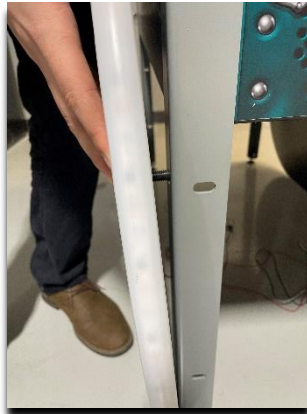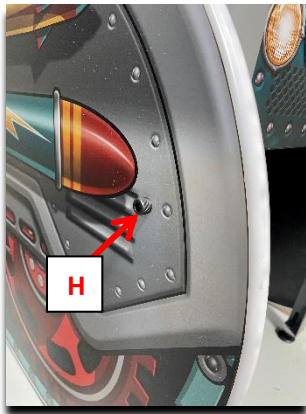

At this point, one side should be fully assembled. Repeat these steps for the other side of tank.

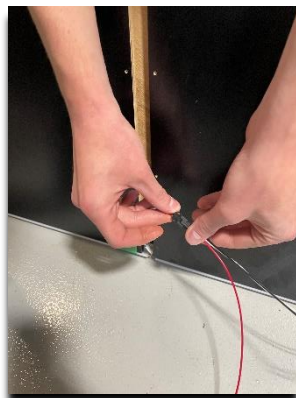

With both sides of the tank attached to the machine, plug the open ends of the LED connector cables [B] into the controller [D]. Plug one end of the adapter [G] into the controller and the other into the wall. The LEDs around the tank treads should turn on.

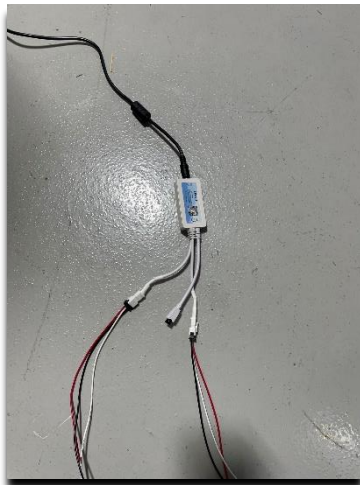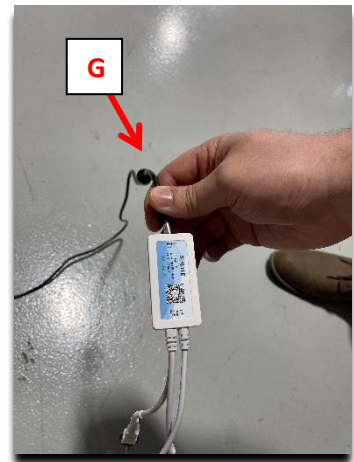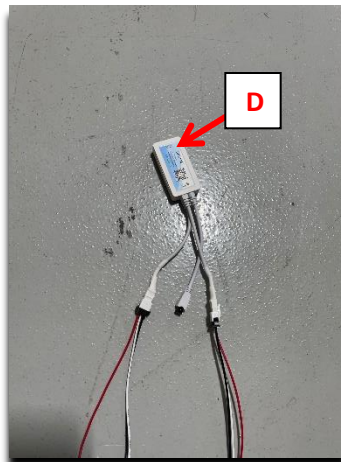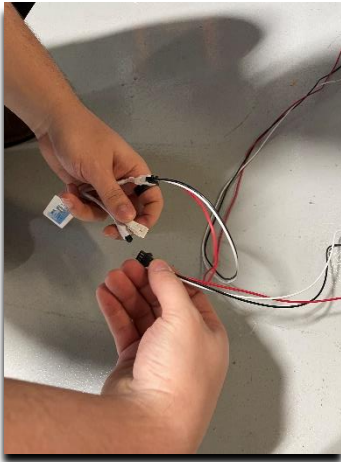

Congratulations! Your tank treads are now fully installed. Use the remote [E] to turn the LED's on/off or change modes.



833-API-HELP

500 S. Hicks Rd. Palatine, IL 60067 -- Phone: 833-API-HELP
www.americanpinball.com